

LANCOM 1780EW-4G+

High-performance 4G LTE VPN router with LTE Advanced, and Wi-Fi



No matter what connection is available, this powerful SD-WAN gateway offers maximum flexibility so you can work from any location. Featuring integrated LTE Advanced for up to 300 Mbps and providing 11ac wireless LAN (Wi-Fi 5), it offers flexible working and surfing to employees and guests, and it provides secure VPN connectivity to company networks when on the road. Alternatively, this device operates with an external modem at its Gigabit Ethernet port.

- Versatile business VPN router with LTE/4G cellular networking for up to 300 Mbps (CAT6)
- Wi-Fi operation at 2.4 or 5 GHz with up to 867 Mbps via IEEE 802.11ac or 300 Mbps via IEEE 802.11n
- Gigabit Ethernet interface with PoE (802.3at)
- SD-WAN – automatic VPN- and VLAN configuration with the LANCOM Management Cloud
- SD-WLAN – automatic Wi-Fi configuration via the LANCOM Management Cloud
- Secure site connectivity with 5 simultaneous IPSec VPN connections (25 channels optional)
- Network virtualization with up to 16 networks on one device (ARF)
- Security Made in Germany
- Maximum future compatibility, reliability, and security



LCOS 10.80

LANCOM 1780EW-4G+

LTE Advanced with up to 300 Mbps

The integrated LTE-4G modem of the LANCOM 1780EW-4G+ offers high-speed 4G connections at up to 300 Mbps. By enabling mobile operation in this way, the LANCOM 1780EW-4G supports, for example, a mobile conference room that offers temporary yet secure Wi-Fi access to company networks.

WLAN nach IEEE 802.11ac

Featuring both IEEE 802.11ac and 802.11n Wi-Fi, the LANCOM 1780EW-4G+ provides wireless networking to clients in the 2.4- or 5-GHz frequency range at speeds of up to 867 Mbps via 11ac or up to 300 Mbps via 11n. Thanks to multi-SSID, the wireless LAN also supports multiple networks that are securely separated from one another.

LANCOM SD-WAN – Next-level networking

With LANCOM SD-WAN you can manage and monitor your entire corporate network centrally, cost-effectively, quickly, and stress-free! In combination with the LANCOM Management Cloud, the SD-WAN gateway gives you all the options for an automated setup of secure VPN connections (Auto-VPN) between sites, including network virtualization. Highlight features such as High Scalability VPN (HSVPN) and Advanced Mesh VPN offer you a significant plus in scalability and efficiency for a large number of branches and applications. Furthermore, if multiple WAN connections are defined, they are automatically operated in active/active mode (load balancing), thereby increasing the available total bandwidth. With Dynamic Path Selection and Dynamic Traffic Steering, applications are also dynamically routed via the best connection at any given time.

Secure communication via VPN

With virtual private networks (VPN), you use the public medium of the Internet as a communication path and secure the connection in such a way that the communication still remains completely inaccessible to external parties. This SD-WAN gateway offers you five integrated IPSec VPN channels for secure encryption, so that the protection of internal company data is always guaranteed when connecting mobile employees, home offices, or branch offices. With the LANCOM VPN Option, you can also upgrade the device to up to 25 VPN channels, so that the infrastructure can easily grow with your needs without additional hardware.

Advanced Routing & Forwarding

The LANCOM 1780EW-4G+ provides up to 16 securely isolated IP contexts, each of which has its own separate routing. This is an elegant way of operating IP applications with one central router and keeping the different communication channels securely separated from one another.



LCOS 10.80

LANCOM 1780EW-4G+

WLAN product specifications

Frequency band 2.4 GHz and 5 GHz	2400-2483.5 MHz (ISM), 5150-5350 MHz and 5470-5725 MHz (depending on country-specific restrictions)
Data rates IEEE 802.11ac/n	867 Mbps according to IEEE 802.11ac with MCS9 (fallback to 6,5 Mbps with MCS0). Compatible to IEEE 802.11ac/n/a, IEEE 802.11 ac/n, IEEE 802.11n/a compatibility mode or pure IEEE 802.11ac, pure IEEE 802.11n, pure IEEE 802.11a mode and data rates selectable
Data rates IEEE 802.11n	300 Mbps according to IEEE 802.11n with MCS15 (fallback to 6,5 Mbps with MCS0). Compatible to IEEE 802.11a/n, IEEE 802.11g/n, IEEE 802.11b/g/n or IEEE 802.11b/g compatibility mode or pure IEEE 802.11n, pure IEEE 802.11a, IEEE 802.11g or pure IEEE 802.11b mode and data rates selectable
Data rates IEEE 802.11a/ h	54 Mbps (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection), fully compatible with TPC (adjustable power output) and DFS (automatic channel selection, radar detection) and data rates selectable
Data rates IEEE 802.11b/g	54 Mbps to IEEE 802.11g (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection) compatible to IEEE 802.11b (11, 5.5, 2, 1 Mbps, Automatic Rate Selection), IEEE 802.11b/g compatibility mode or pure IEEE 802.11g or pure IEEE 802.11b and data rates selectable
Range IEEE 802.11ac/n/a/g/b *	Up to 150 m (up to 30 m in buildings)
Output power at radio module, 5 GHz and per transmit chain	IEEE 802.11a/h: +17 dBm @ 54 MBit/s; IEEE 802.11an/ac: +16 dBm @ (MCS7, 20 MHz), +15 dBm @ (MCS7, 40 MHz), +15 dBm (MCS9, 20 MHz), +14 dBm (MCS9, 40/80 MHz)
Output power at radio module, 2.4 GHz and per transmit chain	IEEE 802.11b/g: +18 dBm @ 54 MBit/s, IEEE 802.11n: +16 dBm @ (MCS7, 20 MHz), +16 dBm @ (MCS7, 40 MHz)
Max. allowed radiation power (EIRP), 5 GHz	IEEE 802.11a/h: Up to 30 dBm / 1000 mW EIRP (depending on national regulations on channel usage and subject to further obligations such as TPC and DFS)
Max. allowed radiation power (EIRP), 2.4 GHz	IEEE 802.11b/g: Up to 20 dBm / 100 mW EIRP (transmission power control according to TPC)
Minimum transmission power	Transmission power reduction in software in 1 dB steps to min. 0.5 dBm
Receiver sensitivity 5 GHz	IEEE 802.11a/h: -80 dBm @ 54 MBit/s, IEEE 802.11an/ac: -75 dBm @ (MCS7, 20/40MHz), -71 dBm @ (MCS9, 20/40 MHz), -68 dBm (MCS9, 80 MHz)
Receiver sensitivity 2.4 GHz	IEEE 802.11b/g: -80 dBm @ 54 MBit/s, IEEE 802.11n: -77 dBm @ (MCS7, 20 MHz), -75 dBm @ (MCS7, 40 MHz)
Radio channels 5 GHz	Up to 26 non-overlapping channels (available channels and further obligations such as automatic DFS dynamic channel selection depending on national regulations)
Radio channels 2.4 GHz	Up to 13 channels, max. 3 non-overlapping (depending on country-specific restrictions)
Multi-SSID	Up to 30 independent WLAN networks; time-controlled activation and deactivation of WLAN networks
Concurrent WLAN clients	Up to 65 clients (recommended), 128 clients (max.)
*) Note	The effective distances and transmission rates that can be achieved are depending of the onsite RF conditions
**) Note	The 11ac WLAN module supports max. 128 clients, this specification refers to the combination with the 11n radio module.



LCOS 10.80

LANCOM 1780EW-4G+

Supported WLAN standards

IEEE standards	IEEE 802.11ac (Wi-Fi 5), IEEE 802.11n (Wi-Fi 4), IEEE 802.11a, IEEE 802.11g, IEEE 802.11b, IEEE 802.11i, IEEE 802.1X, IEEE 802.11u, IEEE 802.11r (Fast Roaming), IEEE 802.11w (Protected Management Frames), WME and U-APSD/WMM Power Save as defined in IEEE 802.11e, IEEE 802.11h, IEEE 802.11d
----------------	---

Standard IEEE 802.11ac (Wi-Fi 5)

Supported features	2x2 MIMO, 80 MHz channels, QAM-256
--------------------	------------------------------------

Standard IEEE 802.11n (Wi-Fi 4)

Supported features	2x2 MIMO, 40 MHz channel, 20/40MHz coexistence mechanisms in the 2.4 GHz band, MAC aggregation, Block Acknowledgement, STBC (Space Time Block Coding), LDPC (Low Density Parity Check), MRC (Maximal Ratio Combining), Short Guard Interval
--------------------	---

WLAN operating modes

Modes	WLAN access point (standalone, WLC or LANCOM Management Cloud managed), WLAN bridge (P2P or P2MP), (standalone, WLC or LANCOM Management Cloud managed), WLAN client mode, transparent WLAN client mode
-------	---

Security

Encryption options	WPA3-Personal, IEEE 802.1X (WPA3-Enterprise, WPA2-Enterprise), IEEE 802.11i (WPA2-Personal), Wi-Fi Certified™ WPA2™, WPA, WEP, IEEE 802.11w (Protected Management Frames), LEPS-MAC (LANCOM Enhanced Passphrase Security MAC), LEPS-U (LANCOM Enhanced Passphrase Security User)
Encryption	AES-CCMP AES-GCMP, TKIP, RC4 (only used by WEP)
EAP types (authenticator)	EAP-TLS, EAP-TTLS/MSCHAPv2, PEAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-FAST
RADIUS/EAP-server	User administration MAC-based, rate limiting, passphrases, VLAN user based, authentication of IEEE 802.1X clients via EAP-TLS, EAP-TTLS, EAP-MD5, EAP-GTC, PEAP, MSCHAP, MSCHAPv2, Dynamic Peer Discovery
Others	WLAN protocol filters, IP-redirection of any packet received over the WLAN interface, IEEE 802.1X supplicant, background scanning, client detection ("rogue WLAN client detection"), Wireless Intrusion Detection System (WIDS), RADIUS CoA (Change of Authorization)

LANCOM Active Radio Control

Client Management	Steering of WLAN clients to the ideal access point using 802.11k and 802.11v
Managed RF Optimization*	Selection of optimal WLAN channels by the administrator
Adaptive Noise Immunity	Better WLAN throughput due to immunity against interferences
Spectral Scan	Monitoring your WLAN for sources of interference
Adaptive RF Optimization	Dynamic selection of the optimal WLAN channel
Airtime Fairness	Improved utilization of the WLAN bandwidth



LCOS 10.80

LANCOM 1780EW-4G+

LANCOM Active Radio Control

Adaptive Transmission Power Automatic adjustment of the transmission power for Wi-Fi backup scenarios

***) Note** Only in installations with WLAN controller

Roaming

Roaming IAPP (Inter Access Point Protocol), IEEE 802.11r (Fast Roaming), OKC (Opportunistic Key Caching), Fast Client Roaming (only in operating mode client modus)

LTE modem

Supported standards LTE, UMTS and HSPA support (mode of transmission automatically or manually adjustable), 2G/GSM is not supported

Supported mobile bands (3G/4G) Band 1 (2100 MHz), Band 2 (1900 MHz), Band 3 (1800 MHz), Band 4 (2100 MHz), Band 5 (800 MHz), Band 7 (2600 MHz), Band 8 (900 MHz), Band 12 (700 MHz), Band 13 (700 MHz), Band 20 (800 MHz), Band 25 (1900 MHz), Band 26 (800 MHz), Band 29 (700 MHz), Band 30 (2300 MHz), Band 38 (2600 MHz), Band 41 (2500 MHz)

Maximum transmission power +23 dBm

Diversity support Receive diversity on the aux antenna (3G); MIMO (2x2) for LTE (4G)

GPS GPS positioning with optional external GPS antenna (accessory)

Supported SIM card formats* Mini-SIM (2FF), Micro-SIM (3FF) via adaptor, Nano-SIM (4FF) via adaptor

***) Note** LANCOM Systems recommends the use of a standard SIM (2FF / Mini-SIM)

Layer 2 features

VLAN 4096 IDs based on IEEE 802.1q, dynamic assignment

Quality of Service WME based on IEEE 802.11e, Wi-Fi Certified™ WMM®

Rate limiting SSID based, WLAN client based

Multicast IGMP-Snooping, MLD-Snooping, Multicast-to-Unicast-conversion on WLAN interfaces

Protocols Ethernet over GRE-Tunnel (EoGRE), L2TPv3, ARP-Lookup, LLDP, DHCP option 82, IPv6-Router-Advertisement-Snooping, DHCPv6-Snooping, LDRA (Lightweight DHCPv6 Relay Agent), Spanning Tree, Rapid Spanning Tree, ARP, Proxy ARP, BOOTP, DHCP, LACP

Layer 3 features

Firewall Stateful inspection firewall including packet filtering, extended port forwarding, N:N IP address mapping, packet tagging, support for DNS targets, user-defined rules and notifications

Quality of Service Traffic shaping, bandwidth reservation, DiffServ/TOS, packet size control, layer-2-in-layer-3 tagging



LANCOM 1780EW-4G+

Layer 3 features

Security	Intrusion Prevention, IP spoofing, access control lists, Denial of Service protection, detailed settings for handling reassembly, session-recovery, PING, stealth mode and AUTH port, URL blocker, password protection, programmable reset button
PPP authentication mechanisms	PAP, CHAP, MS-CHAP, and MS-CHAPv2
High availability / redundancy	VRRP (Virtual Router Redundancy Protocol), analog/GSM modem backup
Router	IPv4-, IPv6-, NetBIOS/IP multiprotokoll router, IPv4/IPv6 dual stack
SD-WAN Application Routing	SD-WAN Application Routing in connection with the LANCOM Management Cloud
SD-WAN dynamic path selection	SD-WAN dynamic path selection in connection with the LANCOM Management Cloud
Router virtualization	ARF (Advanced Routing and Forwarding) up to separate processing of 16 contexts
IPv4 services	HTTP and HTTPS server for configuration by web interface, DNS client, DNS server, DNS relay, DNS proxy, dynamic DNS client, DHCP client, DHCP relay and DHCP server including autodetection, NetBIOS/IP proxy, NTP client, SNTP server, policy-based routing, Bonjour-Proxy, RADIUS
IPv6 services	HTTP and HTTPS server for configuration by web interface, DHCPv6 client, DHCPv6 server, DHCPv6 relay, DNS client, DNS server, dynamic DNS client, NTP client, SNTP server, Bonjour-Proxy, RADIUS
Dynamic routing protocols	RIPv2, BGPv4, OSPFv2, LISP (Locator/ID Separation Protocol)
IPv4 protocols	DNS, HTTP, HTTPS, ICMP, NTP/SNTP, NetBIOS, PPPoE (server), RADIUS, RADSEC (secure RADIUS), RTP, SNMPv1,v2c,v3, TFTP, TACACS+, IGMPv3
IPv6 protocols	NDP, stateless address autoconfiguration (SLAAC), stateful address autoconfiguration (DHCPv6), router advertisements, ICMPv6, DHCPv6, DNS, HTTP, HTTPS, PPPoE, RADIUS, SMTP, NTP, BGP, LISP, Syslog, SNMPv1,v2c,v3, MLDv2, PIM, NPTv6 (NAT66)
Multicast Routing	PIM (Protocol Independent Multicast), IGMP proxy, MLD proxy
WAN operating mode	VDSL, ADSL1, ADSL2 or ADSL2+ additional with external DSL modem at an ETH port
WAN protocols	PPPoE, Multi-PPPoE, ML-PPP, GRE, EoGRE, PPTP (PAC or PNS), L2TPv2 (LAC or LNS), L2TPv3 with Ethernet-Pseudowire, IPoE (using DHCP or no DHCP), RIP-1, RIP-2, VLAN, IPv6 over PPP (IPv6 and IPv4/IPv6 dual stack session), IP(v6)oE (autokonfiguration, DHCPv6 or static)
Tunneling protocols (IPv4/IPv6)	6to4, 6in4, 6rd (static and over DHCP), Dual Stack Lite (IPv4-in-IPv6-Tunnel), 464XLAT

Security

Intrusion Prevention	Monitoring and blocking of login attempts and port scans
IP spoofing	Source IP address check on all interfaces: only IP addresses belonging to the defined IP networks are allowed
Access control lists	Filtering of IP or MAC addresses and preset protocols for configuration access



LANCOM 1780EW-4G+

Security

Denial of Service protection	Protection from fragmentation errors and SYN flooding
General	Detailed settings for handling reassembly, PING, stealth mode and AUTH port
Password protection	Password-protected configuration access can be set for each interface
Alerts	Alerts via e-mail, SNMP traps and SYSLOG
Authentication mechanisms	EAP-TLS, EAP-TTLS, PEAP, MS-CHAP, MS-CHAPv2 as EAP authentication mechanisms, PAP, CHAP, MS-CHAP and MS-CHAPv2 as PPP authentication mechanisms
GPS anti-theft	Network protection via site verification by GPS positioning, device stops operating if its location is changes
WLAN protocol filters	Limitation of the allowed transfer protocols, source and target addresses on the WLAN interface
Adjustable reset button	Adjustable reset button for 'ignore', 'boot-only' and 'reset-or-boot'
IP redirect	Fixed redirection of any packet received over the WLAN interface to a dedicated target address

High availability / redundancy

VRRP	VRRP (Virtual Router Redundancy Protocol) for backup in case of failure of a device or remote station.
FirmSafe	For completely safe software upgrades thanks to two stored firmware versions, incl. test mode for firmware updates
LTE-Backup	In case of failure of the main connection, a backup connection is established over the internal LTE modem; automatic return to the main connection
Analog/GSM modem backup	Optional operation of an analog or GSM modem at the serial interface
Load balancing	Static and dynamic load balancing over up to 2 WAN connections. Channel bundling with Multilink PPP (if supported by network operator)
VPN redundancy	Backup of VPN connections across different hierarchy levels, e.g. in case of failure of a central VPN concentrator and re-routing to multiple distributed remote sites. Any number of VPN remote sites can be defined (the tunnel limit applies only to active connections). Up to 32 alternative remote stations, each with its own routing tag, can be defined per VPN connection. Automatic selection may be sequential, or dependant on the last connection, or random (VPN load balancing)
Line monitoring	Line monitoring with LCP echo monitoring, dead-peer detection and up to 4 addresses for end-to-end monitoring with ICMP polling

VPN

IPSec over HTTPS	Enables IPSec VPN based on TCP (at port 443 like HTTPS) which can go through firewalls in networks where e. g. port 500 for IKE is blocked. Suitable for client-to-site connections and site-to-site connections. IPSec over HTTPS is based on the NCP VPN Path Finder technology
------------------	---



LCOS 10.80

LANCOM 1780EW-4G+

VPN

Number of VPN tunnels	Max. number of concurrent active IPSec, PPTP (MPPE) and L2TPv2 tunnels: 5 (25 with VPN 25 Option). Unlimited configurable connections. Configuration of all remote sites via one configuration entry when using the RAS user template or Proadaptive VPN.
Hardware accelerator	Integrated hardware accelerator for 3DES/AES encryption and decryption
Realtime clock	Integrated, buffered realtime clock to save the date and time during power failure. Assures timely validation of certificates in any case
Random number generator	Generates real random numbers in hardware, e. g. for improved key generation for certificates immediately after switching-on
1-Click-VPN Client assistant	One click function in LANconfig to create VPN client connections, incl. automatic profile creation for the LANCOM Advanced VPN Client
1-Click-VPN Site-to-Site	Creation of VPN connections between LANCOM routers via drag and drop in LANconfig
IKE, IKEv2	IPSec key exchange with Preshared Key or certificate (RSA signature, ECDSA-Signature, digital signature)
Smart Certificate*	Convenient generation of digital X.509 certificates via an own certification authority (SCEP-CA) on the webpage or via SCEP.
Certificates	X.509 digital multi-level certificate support, compatible with Microsoft Server / Enterprise Server and OpenSSL. Secure Key Storage protects a private key (PKCS#12) from theft.
Certificate rollout	Automatic creation, rollout and renewal of certificates via SCEP (Simple Certificate Enrollment Protocol) per certificate hierarchy
Certificate revocation lists (CRL)	CRL retrieval via HTTP per certificate hierarchy
OCSP Client	Check X.509 certifications by using OCSP (Online Certificate Status Protocol) in real time as an alternative to CRLs
OCSP Server/Responder*	Offers validity information for certificates created with Smart Certificate via OCSP
XAUTH	XAUTH client for registering LANCOM routers and access points at XAUTH servers incl. IKE-config mode. XAUTH server enables clients to register via XAUTH at LANCOM routers. Connection of the XAUTH server to RADIUS servers provides the central authentication of VPN-access with user name and password. Authentication of VPN-client access via XAUTH and RADIUS connection additionally by OTP token
RAS user template	Configuration of all VPN client connections in IKE ConfigMode via a single configuration entry
Proadaptive VPN	Automated configuration and dynamic creation of all necessary VPN and routing entries based on a default entry for site-to-site connections.
Algorithms	3DES (168 bit), AES-CBC and -GCM (128, 192 or 256 bit), RSA (1024-4096 bit), ECDSA (P-256-, P-384-, P-521-curves) and Chacha20-Poly 1305. OpenSSL implementation with FIPS-140 certified algorithms. MD-5, SHA-1, SHA-256, SHA-384 or SHA-512 hashes
NAT-Traversal	NAT-Traversal (NAT-T) support for VPN over routes without VPN passthrough



LCOS 10.80

LANCOM 1780EW-4G+

VPN

Dynamic DNS	Enables the registration of IP addresses with a Dynamic DNS provider in the case that fixed IP addresses are not used for the VPN connection
Specific DNS forwarding	DNS forwarding according to DNS domain, e.g. internal names are translated by proprietary DNS servers in the VPN. External names are translated by Internet DNS servers
Split DNS	Allows the selective forwarding of traffic for IKEv2 depending on the addressed DNS domain.
IPv4 VPN	Connecting private IPv4 networks
IPv4 VPN over IPv6 WAN	Use of IPv4 VPN over IPv6 WAN connections
IPv6 VPN	Connecting private IPv6 networks
IPv6 VPN over IPv4 WAN	Use of IPv6 VPN over IPv4 WAN connections
Radius	RADIUS authorization and accounting, outsourcing of VPN configurations in external RADIUS server in IKEv2, RADIUS CoA (Change of Authorization)
High Scalability VPN (HSVPN)	Transmission of multiple, securely separated networks within a VPN tunnel
Advanced Mesh VPN	On demand dynamic VPN tunnel establishment between branches
IKEv2-EAP*	VPN clients can be authenticated with IKEv2-EAP against a central database like Microsoft Windows Server or RADIUS Server
Two-factor authentication*	Two-factor authentication with LANCOM Advanced VPN Client via IKEv2 EAP-OTP
*)	Only with VPN 25 option

Performance

Routing-Performance	Data regarding the overall routing performance can be found inside the LANCOM tech paper "Routing-Performance" on www.lancom-systems.com
---------------------	--

VoIP

SIP ALG	The SIP ALG (Application Layer Gateway) acts as a proxy for SIP communication. For SIP calls the ALG opens the necessary ports for the corresponding media packets. Automatic address translation (STUN is no longer needed).
---------	---

Interfaces

ETH1 (PoE)	10/100/1000 Base-T, autosensing, auto node hub, PoE compliant with IEEE 802.3af/at. The port supports energy saving according to IEEE 802.3az
ETH2	10/100/1000 Base-T, default WAN port, configurable as LAN port. The port supports energy saving according to IEEE 802.3az



LCOS 10.80

LANCOM 1780EW-4G+

Interfaces

Serial interface	Serial configuration interface / COM port (8 pin Mini-DIN): 9,600 - 115,000 baud, suitable for optional connection of analog/GPRS modems. Supports internal COM port server and allows for transparent asynchronous transmission of serial data via TCP
External antenna connectors	Two reverse SMA connectors
External antenna connectors	Two SMA antenna connectors for external LTE antennas (Ant 1, Ant 2) additional connector for optional GPS antenna (not included in package content)

Management and monitoring

Management	LANCOM Management Cloud, LANconfig, WEBconfig, WLAN controller, LANCOM Layer 2 management (emergency management)
Management functions	Alternative boot configuration, voluntary automatic updates for LCMS and LCOS, individual access and function rights up to 16 administrators, RADIUS and RADSEC user management, remote access (WAN or (W)LAN, access rights (read/write) adjustable separately), SSL, SSH, HTTPS, Telnet, TFTP, SNMP, HTTP, access rights via TACACS+, scripting, timed control of all parameters and actions through cron job
FirmSafe	Two stored firmware versions, incl. test mode for firmware updates
automatic firmware update	configurable automatic checking and installation of firmware updates
Monitoring	LANCOM Management Cloud, LANmonitor, WLANmonitor
Monitoring functions	Device SYSLOG, SNMPv1,v2c,v3 incl. SNMP-TRAPS, extensive LOG and TRACE options, PING and TRACEROUTE for checking connections, internal logging buffer for firewall events
Monitoring statistics	Extensive Ethernet, IP and DNS statistics; SYSLOG error counter, accounting information exportable via LANmonitor and SYSLOG, Layer 7 Application Detection including application-centric tracking of traffic volume
IPerf	IPerf is a tool for measurements of the bandwidth on IP networks (integrated client and server)
SLA-Monitor (ICMP)	Performance monitoring of connections
Netflow	Export of information about incoming and outgoing IP traffic
SD-WLAN	SD-WLAN – automatic WLAN configuration via the LANCOM Management Cloud
SD-LAN	SD-LAN – automatic LAN configuration via the LANCOM Management Cloud
SD-WAN	SD-WAN – automatic WAN configuration via the LANCOM Management Cloud

Hardware

Weight	1,32 lbs (600 g)
Power supply	Via Power over Ethernet, compliant with IEEE 802.3af*/at



LCOS 10.80

LANCOM 1780EW-4G+

Hardware

Environment	Temperature range 0–35° C; humidity 0–95%; non-condensing; Temperature range 0–40°C in a vertical mounting position using the LANCOM Wall Mount with cable routing to the side
Housing	Robust synthetic housing, rear connectors, ready for wall mounting, Kensington lock; 210 x 45 x 140 mm (W x H x D)
Fans	None; fanless design without rotating parts, high MTBF
Power consumption (max)	Approx. 13 watt with 12 V power supply adapter, approx. 14 watt via PoE
*) Note	It is recommended to use a PoE adapter or switch with IEEE 802.3at support. Using PoE with IEEE 802.3af the LTE module is not available.

Declarations of conformity*

Europe/EFTA	CE
North America	FCC/IC
Australia / New Zealand	RCM
IPv6	IPv6 Ready Gold
Country of Origin	Made in Germany
*) Note	You will find all declarations of conformity on our website at www.lancom-systems.com/doc

Scope of delivery

Manual	Hardware Quick Reference (DE/EN), Installation Guide (DE/EN)
Cable	2 Ethernet cables, 3m
Antennas	Two 3 dBi dipole antennas (Gain depends on frequency.)
Antennas	Two 2 dBi LTE/UMTS-antennas
GPS antenna	Passive GPS antenna can be ordered free of charge with enclosed voucher
Power supply unit	External power adapter (230 V), NEST 12 V/2.0 A DC/S, coaxial power connector 2.1/5.5 mm, temperature range from -5 to +45° C, LANCOM item no. 111303 (EU)/ External power adapter (230 V), NEST 12 V/1.5 A DC/S, coaxial power connector 2.1/5.5 mm, temperature range from -5 to +45° C, LANCOM item no 110829 (UK)

Support

Warranty extension	Free warranty extension up to 3 years (replacement service for defects) For details, please refer to the service and support conditions at www.lancom-systems.com/support-conditions or at www.lancom.de/rma .
--------------------	---



LANCOM 1780EW-4G+

Support

Security updates	Up to 2 years after End of Sale of the device (but min. 3 years, see www.lancom-systems.com/product-tables), can be extended by purchasing LANcare products
Software updates	Regular free updates including new features as part of the LANCOM Lifecycle Management (www.lancom-systems.com/lifecycle)
Manufacturer support	For LANcommunity partners up to the End of Life of the device For end customers with LANcare Direct or LANcare Premium Support during the LANcare validity
LANcare Basic S	Security updates until EOL (min. 5 years) and 5 years replacement service with shipment of the replacement device within 5 days after arrival of the defective device (8/5/5Days), item no. 10720
LANcare Advanced S	Security updates until EOL (min. 5 years) and 5 years NBD advance replacement with delivery of the replacement device within one business day (8/5/NBD), item no. 10730
LANcare Direct Advanced 24/7 S	Direct, prioritized 10/5 manufacturer support incl. 24/7 emergency hotline and security updates for the device, NBD advance replacement with delivery of the device on the next business day (24/7/NBD), guaranteed first response times (SLA) of max. 30 minutes for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years (item no. 10776, 10777 or 10778)
LANcare Direct 24/7 S	Direct, prioritized 10/5 manufacturer support incl. 24/7 emergency hotline and security updates for the device, guaranteed first response times (SLA) of max. 30 minutes for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years (item no. 10752, 10753 or 10754)
LANcare Direct Advanced 10/5 S	Direct, prioritized 10/5 manufacturer support and security updates for the device, NBD advance replacement with delivery of the device on the next business day (10/5/NBD), guaranteed first response times (SLA) of max. 2 hours for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years.(item no. 10764, 10765 or 10766)
LANcare Direct 10/5 S	Direct, prioritized 10/5 manufacturer support and security updates for the device, guaranteed first response times (SLA) of max. 2 hours for reporting massive operational disruptions by telephone (priority 1) and max. 4 hours for all other concerns (priority 2), term-based for 1, 3, or 5 years.(item no. 10740, 10741 or 10742)

Software

Lifecycle Management	After discontinuation (End of Sale), the device is subject to the LANCOM Lifecycle Management. Details can be found at: www.lancom-systems.com/lifecycle
Anti-backdoor policy	Products from LANCOM are free of hidden access paths (backdoors) and other undesirable features for introducing, extracting or manipulating data. The trust seal "IT Security made in Germany" (ITSMIG) and certification by the German Federal Office for Information Security (BSI) confirm the trustworthiness and the outstanding level of security.

Options

VPN	LANCOM VPN-25 Option (25 channels), item no. 60083
LANCOM Content Filter	LANCOM Content Filter +10 user (additive up to 100), 1 year subscription, item no. 61590
LANCOM Content Filter	LANCOM Content Filter +25 user (additive up to 100), 1 year subscription, item no. 61591



LCOS 10.80

LANCOM 1780EW-4G+

Options

LANCOM Content Filter	LANCOM Content Filter +100 user (additive up to 100), 1 year subscription, item no. 61592
LANCOM Content Filter	LANCOM Content Filter +10 user (additive up to 100), 3 year subscription, item no. 61593
LANCOM Content Filter	LANCOM Content Filter +25 user (additive up to 100), 3 year subscription, item no. 61594
LANCOM Content Filter	LANCOM Content Filter +100 user (additive up to 100), 3 year subscription, item no. 61595
LANCOM BPjM Filter	LANCOM BPjM Filter Option, 5 years subscription, item no. 61418
LANCOM Public Spot	Hotspot option for LANCOM products, versatile access (via voucher, e-mail, SMS), including a comfortable setup wizard, secure separation of guest access and internal network, item no. 60642
LANCOM Public Spot (10 bulk)	Hotspot option for LANCOM products, versatile access (via voucher, e-mail, SMS), including a comfortable setup wizard, secure separation of guest access and internal network (10 bulk), item no. 61312
LANCOM All-IP Lizenz Option	Upgrade option for the operation of the LANCOM routers with All-IP connections, support of PBX systems and telephony devices as well as voice & fax services, incl. Voice Call Manager, item no. 61419
LANCOM Public Spot PMS Accounting Plus	Extension of the LANCOM Public Spot (XL) Option for the connection to hotel billing systems with FIAS interface (such as Micros Fidelio) for authentication and billing of guest accesses for 178x/19xx routers, 2100EF, WLCs, and current central-site gateways, item no. 61638
LANCOM VoIP +10 Option	Upgrade for LANCOM VoIP router with 10 additional internal VoIP numbers (additionally up to 40) and 10 external SIP lines (additionally up to 55) item no. 61423

LANCOM Management Cloud

LANCOM LMC-B-1Y LMC License	LANCOM LMC-B-1Y License (1 Year), enables the management of one category B device for one year via the LANCOM Management Cloud, item no. 50103
LANCOM LMC-B-3Y LMC License	LANCOM LMC-B-3Y License (3 Years), enables the management of one category B device for three years via the LANCOM Management Cloud, item no. 50104
LANCOM LMC-B-5Y LMC License	LANCOM LMC-B-5Y License (5 Years), enables the management of one category B device for five years via the LANCOM Management Cloud, item no. 50105

Accessories

LANCOM WLAN controllers	LANCOM WLC-30, Art.-Nr. 61789 (EU), LANCOM WLC-1000, Art.-Nr. 61783 (EU), LANCOM WLC Basic Option for Routers, Art.-Nr. 61639
External antenna	AirLancer I-360D-5G, omnidirectional outdoor antenna MIMO (2x2), for all 4G/5G bands (698-3800 MHz), item no. 60919
External antenna	AirLancer O-360D-5G, omnidirectional outdoor antenna MIMO (2x2), for all 4G/5G bands (698-3800 MHz), item no. 61233
19" Rack Mount	19" rack mount adaptor, item no. 61501



LCOS 10.80


LANCOM 1780EW-4G+

Accessories

19" Rack Mount	19" rack mount plus adaptor, item no. 61644
LANCOM Wall Mount	For simple, theft-proof mounting of LANCOM devices with plastic housings, item no. 61349
LANCOM Wall Mount (White)	For simple, theft-proof mounting of LANCOM devices with plastic housings, item no. 61345
LANCOM Serial Adapter Kit	For the connection of V.24 modems with AT command set and serial interface for the connection to the LANCOM COM interface, incl. serial cable and connection plug, item no. 61500
VPN Client Software	LANCOM Advanced VPN Client for Windows 7,8/8.1,10,11 - single license, item no. 61600
VPN Client Software	LANCOM Advanced VPN Client for Windows 7,8/8.1,10,11 - 10 licenses, item no. 61601
VPN Client Software	LANCOM Advanced VPN Client for Windows 7,8/8.1,10,11 - 25 licenses, item no. 61602
VPN Client Software	LANCOM Advanced VPN Client for Mac OS X (10.5 Intel only, 10.6 or higher), single license, item no. 61606
VPN Client Software	LANCOM Advanced VPN Client for Mac OS X (10.5 Intel only, 10.6 or higher), 10 licenses, item no. 61607
*) Note	The polarization diversity antennas require 2 cables and surge arrestors

Item number(s)

LANCOM 1780EW-4G+ (EU)	61712
LANCOM 1780EW-4G+ (UK)	61713

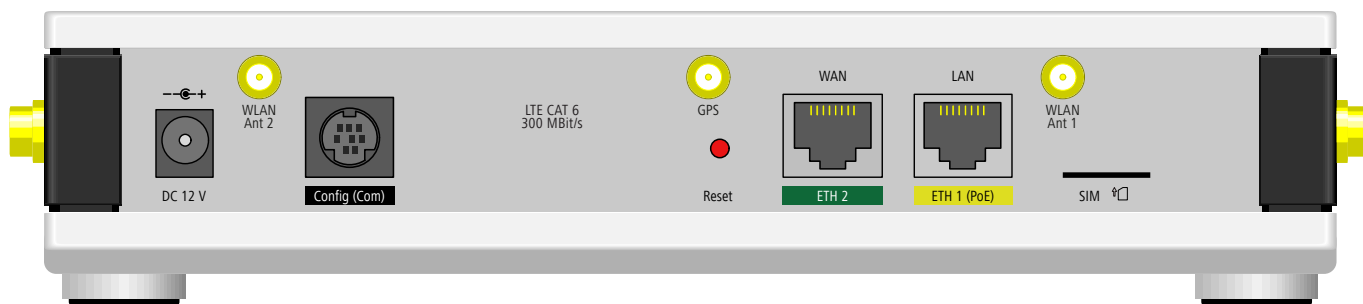

LANCOM Systems GmbH
A Rohde & Schwarz Company
Adenauerstr. 20/B2
52146 Wuerselen | Germany
info@lancom.de | www.lancom-systems.com

LANCOM, LANCOM Systems, LCOS, LANcommunity and Hyper Integration are registered trademarks. All other names or descriptions used may be trademarks or registered trademarks of their owners. This document contains statements relating to future products and their attributes. LANCOM Systems reserves the right to change these without notice. No liability for technical errors and/or omissions. 11/24