

Serie | 2, Wall-mounted cooker hood,
90 cm, clear glass
DWG94BC50B



Optional accessories

- DHZ1225 : Chimney extension 1000 mm
- DHZ1235 : Chimney extension 1500 mm
- DHZ9550 : Brushed steel back panel
- DHZ9551 : Brushed steel back panel
- DWZ0DX0A0 : Standard odor filter (replacement)
- DWZ0DX0U0 : Standard recirculation kit
- DWZ0XX0J0 : Long Life recirculation kit
- DZZ0XX0P0 : Long Life odor filter (replacement)

Hood with glass design: performance
combined with straight glass design
matching your kitchen.



Technical Data

Typology :	Chimney
Approval certificates :	CE, VDE
Length of electrical supply cord (cm) :	130
Height of the chimney (mm) :	576-906/576-998
Height of product, without chimney (mm) :	59
Minimum distance above an electric hob :	550
Minimum distance above a gas hob :	650
Net weight (kg) :	14.675
Type of control :	mechanical
Number of speed settings :	3
Maximum output air extraction (m3/h) :	365
Number of lights (Stck) :	2
Noise level (dB(A) re 1 pW) :	64
Diameter of air outlet (mm) :	120 / 150
Grease filter material :	Washable aluminium
EAN code :	4242005051175
Connection rating (W) :	100
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50; 60
Plug type :	GB plug
Installation type :	Wall-mounted



4 242005 051175

**Serie | 2, Wall-mounted cooker hood, 90 cm,
clear glass
DWG94BC50B**

**Hood with glass design: performance
combined with straight glass design
matching your kitchen.**

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 365 m³/h
- Noise max. Normal Level: Noise, max. speed in normal use: 64 dB dB*

Features

- Push button control
- 3 power levels
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- 2 removable metal grease filter cassettes
- Designed for wall mounted installation

Design

- Chimney extractor hood
- Mechanical

Performance/technical information




- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Maximum extraction rate exhaust air 365 m³/h according to EN 61591
- Extraction rate in recirculation mode: Max. normal use: 195 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 64 dB(A) re 1 pW
- Noise level in recirculation mode: Max. normal use: 66 dB(A) re 1 pW (53 dB(A) re 20 µPa sound pressure)
- Power rating: 100 W
- Light Intensity: 91 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 635-965 x 900 x 525 mm
- Dimensions recirculating (HxWxD): 635-1075 x 900 x 525 mm
- Dimensions recirculating with CleanAir module (HxWxD): 703 x 900 x 525 mm - mounting with outer chimney 833-1163 x 900 x 525 mm - mounting with telescopic chimney
- Blower Efficiency Class: E*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 53.1 kWh/year*

Optional accessories

- Recirculating kit DHZ1225


* In accordance with the EU-Regulation No 65/2014

Serie | 2, Wall-mounted cooker hood, 90 cm, clear glass DWG94BC50B

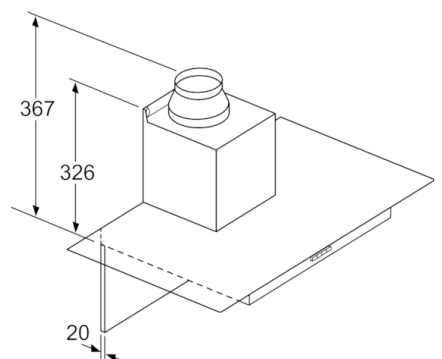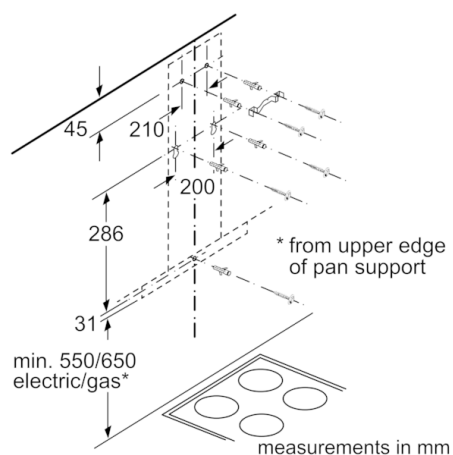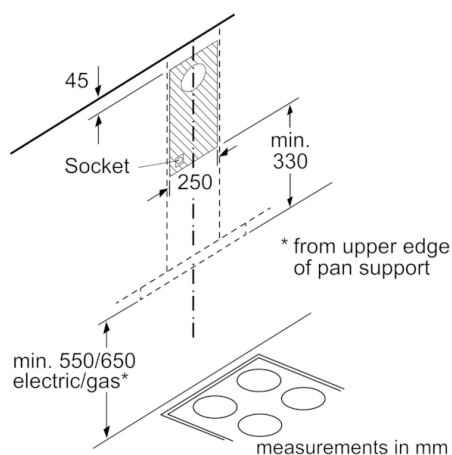

If a back panel is used,
the design of the appliance
must be considered.

measurements in mm

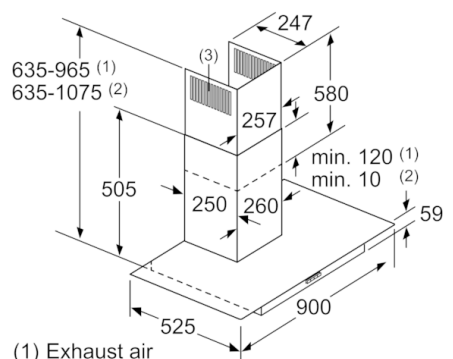

- (1) Exhaust air
- (2) Circulated air
- (3) Air outlet – slots for exhaust air
to be mounted facing down

measurements in mm